

NP200W-LPG



Remote Monitoring Done Right

Utilizing standard 802.11b/g/n WiFi or advanced cellular connectivity, the LevelCon F100 can jump on nearly any network and send valuable tank inventory levels directly to our secure cloud. Check reported levels straight from your phone, tablet, or PC, and easily configure email alerts for low levels and/or fill events.



Float Gage
Junior or Senior



Twin-site Dial

This unit offers local customer network WiFi connectivity to LPG tank levels. Values are periodically transferred to LCON site for customer web based applications. The LCON web site is a secure web portal which gives customers multilevel access over the internet. Unit includes level transmitter, twin site dial for standard junior or senior gages.

******* LPG level Data is totally free *******




LPG, Fuel Oil or Ammonia

Technology

- GSM, CDMA, 4G LTE communication
- 802.11g WiFi
- 24/7 access to data on LevelCon Cloud
- Integrated temperature sensor
- Easy configuration from any WiFi device
- GSM

NP200W-LPG

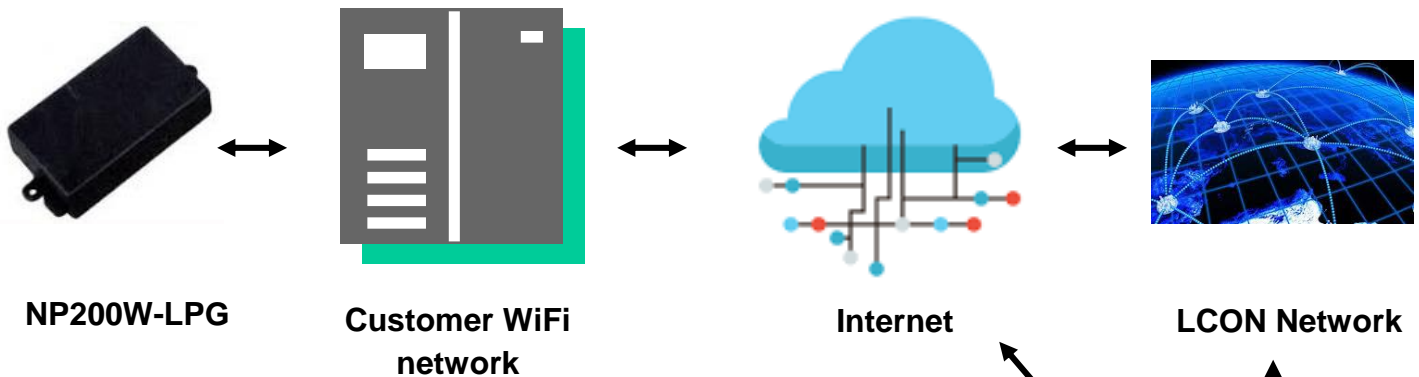

Specifications

On-Board low power WiFi

Battery power level
 External Power level
 Internal power 3.3 VDC
 Internal Power 5.0 VDC
 Sensor power 1 5.0 VDC
 Sensor Power 2 16 VDC
 Barometric pressure
 Ambient temperature
 Accelerometer

4 Digital Inputs
 4 Digital outputs
 RS485 with modbus protocol
 On board GPS unit

5.0 – 15.0 VDC @ 120 mA supply power
 12 VDC battery power with 8 AA cells
 Low Power mode power 50 uA
 Enclosure 130mm(l) x 70mm(w) x 60mm(h)

Nema 4, IP 68 enclosure for indoor or outdoor use
 Enclosed in ex-proof conduit for C1D1 applications
 Easy bottom battery access
 Built-in magnet mounts
 Flip tab enclosure mounting ears

LPG setup Menu	
Name:	_____
Address:	_____

WiFi SSID:	_____
Password:	_____
Report time (Hours 00-23):	_____
	<input type="radio"/> Daily <input type="radio"/> Weekly <input type="radio"/> Monthly
Tank Size (Gallons/Liters):	-----
LPG Supplier:	_____
Address:	_____
P:	_____
Contact:	_____

